


### Fixed Attenuator Chip

- ◆ DC to 43.5GHz
- ◆ 2 dB and 6 dB
- ◆ 2 W



#### Features

- Adopting advance GaAs technology
- Excellent attenuation accuracy & phase balance
- High ESD level
- Low VSWR
- Die Package

#### Model No. Description

FACXXXXXX

XX- attenuation: \*\*dB.

XX- attenuation: \*\*dB.

XX-frequency range 06: DC to 6GHz

10: DC to 10GHz

12: DC to 12.4GHz

18: DC to 18GHz

26: DC to 26.5GHz.



43: DC to 43.5GHz.

#### Specifications

Frequency Range	DC to 43.5GHz
Attenuation	2 dB and 6 dB
Nonimal Impeance	50 Ohm
Rated Input Power	2W@25°C 1W@85°C
Operating Temperature	-45 °C to +85 °C

Paramter	Freq.Range (GHz)	Typ. (2dB)	Freq.Range (GHz)	Typ. (6dB)
Attenuation (dB)	DC-5	2±0.10	DC-5	6±0.10
	5-15	2±0.10	5-15	6±0.10
	15-18	2±0.10	15-18	6±0.10
	18-26.5	2±0.20	18-26.5	6±0.15
	26.5-43.5	2±0.40	26.5-43.5	6±0.15
VSWR (:1)	DC-5	1.15	DC-5	1.10
	5-15	1.20	5-15	1.20
	15-18	1.20	15-18	1.25
	18-26.5	1.20	18-26.5	1.30
	26.5-43.5	1.20	26.5-43.5	1.30

#### Test Curve

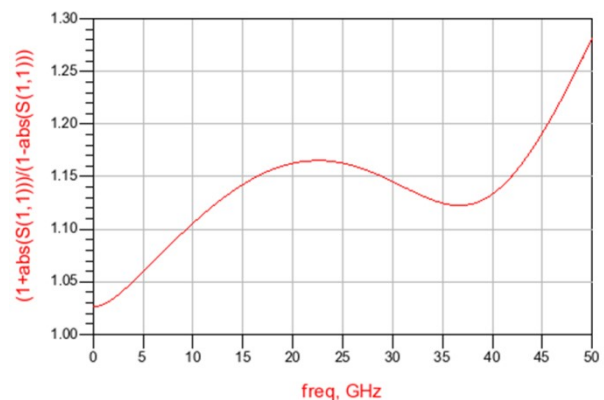
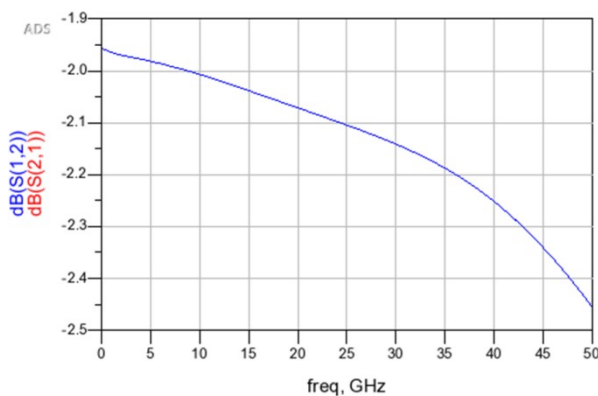


Test result of 2dB

Yantel Corporation



Add: 3F, Building 3, Southern District 2 of ZhongGuan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

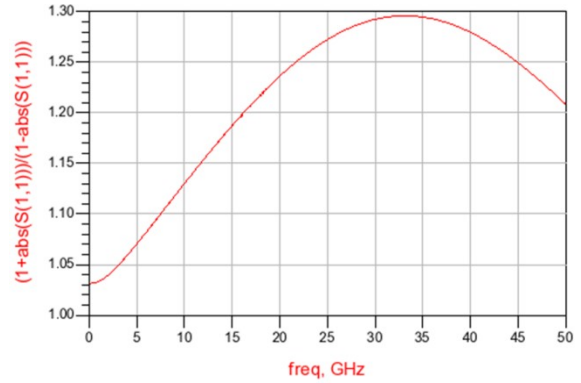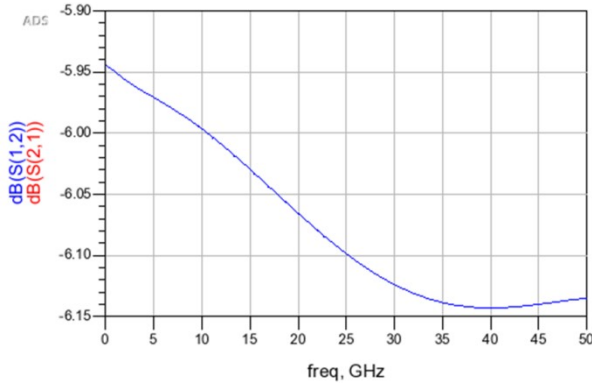


Test result of 6dB

### Pin out

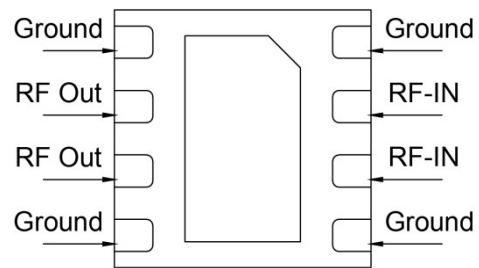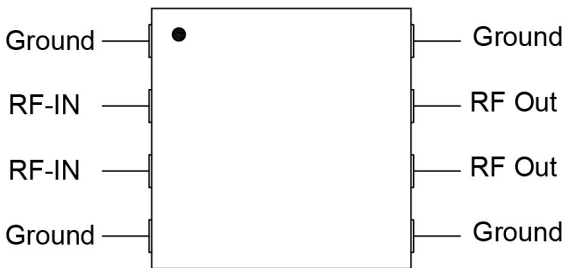


### Land Pattern

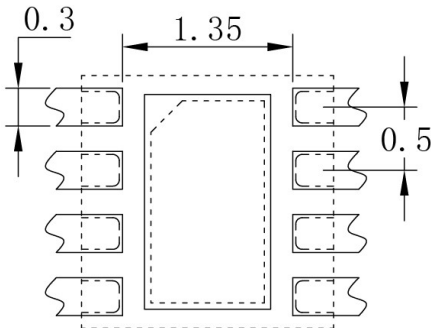

### Package Outlines

Note: all dimensions shown in mm

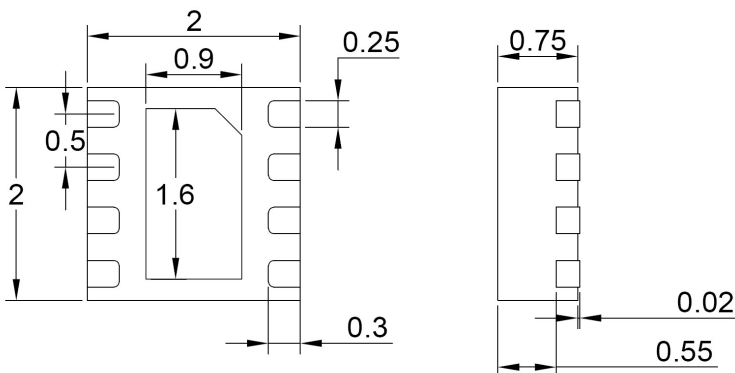

### Yantel Corporation

Add: 3F, Building 3, Southern District 2 of ZhongGuan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China  
 Tel: 86-755-8355-1886 Fax: 86-755-8355-2533