


Rev A1

Description

The products are widely used in China and global 4G/5G base station, 5G network coverage, BeiDou navigation antenna, vehicle-mounted high-precision navigation (unmanned) antenna and other applications. The products have miniaturization, low-loss, wide-bandwidth, high power density, high reliability, high cost-effective and other competitive advantages.



Pin 1

-1.02

Electrical Specifications Features: Insertion Frequency **VSWR** Isolation • 500-1000 MHz Loss AMPS MHz dB Min dB Max Max : 1 High Power 500 - 1000 20 1.20 0.35 Very Low Loss • Tight Amplitude Balance High Isolation Amplitude Phase Operating Low VSWR Power **Balance** Balance Temp. Good Repeatability dB Max Avg. CW Watts °C Degrees • CTE compatible with FR4, G-10, ± 0.70 90 ± 3.0 100 -55 to +95 RF-35, RO4350B and polyimide

- Immersion gold, prevent surface oxidation & scratch
- RoHS Compliant
- Tape & Reel Package available

Notes:

1. All the above data are based on specified demo board.

2. Insertion loss: Thru board loss has been removed.

TOP VIEW **BOTTOM VIEW** SIDE VIEW 1.91 Pin 2 16.51 -1.02 Pin 1 Pin 2 1.50С YANTEL 12.19 6.85 HC0750L03 XXXX 0 0 Pin 3 Pin 4 Pin 3 13.21 Pin 4 Notes: 1. All dimensions show in millimeters 2. RoHS Compliant in accordance with EU Directive(2011/65/EU) 3. Dimension tolerance: ±0.20

Mechanical Outline

Yantel Corporation


Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China Tel: 86-755-8355-1886 Fax: 86-755-8355-2533



Rev A1

Hybrid Coupler Pin Configuration

The HC0750L03 has an orientation marker to denote Pin 1. Once port one has been identified the other ports are known automatically. Please see the chart below for clarification:



	F 11 1	4	FILIS				
Configuration	Pin 1	Pin 2	Pin 3	Pin 4			
Splitter	Input	Isolated	-3dB $\angle \theta - 90$	-3dB $\angle heta$			
Splitter	Isolated	Input	-3dB $\angle heta$	-3dB $\angle \theta - 90$			
Splitter	$-3dB \angle \theta - 90$ $-3dB \angle$		Input	Isolated			
Splitter	-3dB $\angle heta$	-3dB $\angle \theta - 90$	Isolated	Input			
*Combiner	$A \angle \theta - 90$ $A \angle \theta$		Isolated	Output			
*Combiner	biner $A \angle \theta$ $A \angle \theta - 90$		Output	Isolated			
*Combiner	Isolated	Output	$A \angle \theta - 90$	$A \angle heta$			
*Combiner	Output	Output Isolated		$A \angle \theta - 90$			

*Note: "A" is the amplitude of the applied signals. When two quadrature signals with equal amplitudes are applied to the coupler as described in the table, they will combine at the output port. If the amplitudes are not equal, some of the applied energy will be directed to the isolated port.

Typical Performance Data (@25℃)

Frequency Coupling (MHz) (dB)		Transmission (dB)	Insertion Loss	Isolation (dB)	Amplitude Balance	Phase (degree)	Return Loss(dB)				
	(ub)	(dB)		(dB) (degree)		S11	S22	S33	S44		
500	-3.66	-2.59	-0.08	-32.69	-0.57	89.12	-36.04	-38.52	-32.99	-32.94	
525	-3.52	-2.70	-0.08	-33.45	-0.43	89.10	-37.50	-39.62	-33.84	-34.63	
550	-3.41	-2.80	-0.09	-34.87	-0.31	89.08	-38.90	-42.63	-34.87	-35.87	
575	-3.30	-2.88	-0.07	-35.86	-0.21	89.05	-39.69	-43.00	-35.29	-36.30	
600	-3.24	-2.98	-0.10	-36.91	-0.13	89.04	-39.81	-44.59	-36.28	-36.74	
625	-3.17	-3.05	-0.10	-39.06	-0.06	88.98	-39.54	-44.08	-38.25	-38.51	
650	-3.11	-3.10	-0.10	-40.09	-0.01	89.01	-38.26	-40.48	-37.08	-40.23	
675	-3.06	-3.13	-0.08	-38.88	0.04	88.96	-37.06	-38.41	-34.30	-39.70	
700	-3.01	-3.14	-0.06	-36.23	0.07	88.98	-36.74	-37.98	-32.06	-38.54	
725	-3.00	-3.17	-0.07	-35.35	0.08	88.93	-34.91	-37.00	-30.35	-37.86	
750	-3.00	-3.17	-0.08	-33.27	0.09	88.94	-32.84	-34.30	-28.80	-35.37	
775	-3.03	-3.20	-0.10	-31.91	0.08	88.93	-31.55	-32.98	-27.72	-33.73	
800	-3.07	-3.19	-0.12	-30.81	0.06	88.94	-30.11	-32.63	-26.73	-32.62	
825	-3.07	-3.14	-0.09	-30.15	0.03	88.90	-29.11	-31.91	-25.91	-31.78	
850	-3.13	-3.10	-0.11	-29.21	-0.02	88.87	-28.43	-30.55	-25.40	-30.07	
875	-3.20	-3.05	-0.11	-27.99	-0.08	88.87	-27.54	-28.69	-25.11	-28.83	
900	-3.30	-3.00	-0.14	-27.36	-0.15	88.85	-26.68	-27.36	-24.65	-27.82	
925	-3.38	-2.91	-0.13	-26.63	-0.24	88.92	-25.54	-26.83	-24.23	-26.59	
950	-3.51	-2.83	-0.15	-26.05	-0.35	88.92	-24.57	-25.69	-23.73	-25.45	
975	-3.66	-2.74	-0.16	-25.19	-0.48	89.04	-23.35	-24.62	-22.95	-24.15	
1000	-3.81	-2.63	-0.17	-24.25	-0.63	89.19	-22.28	-23.66	-21.98	-23.58	

Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China Tel: 86-755-8355-1886 Fax: 86-755-8355-2533




HC0750L03

Hybrid Coupler 3 dB, 90°

Rev A1

Typical Performance (-55°C, 25°C, 95°C,125°C : 500-1000 MHz)

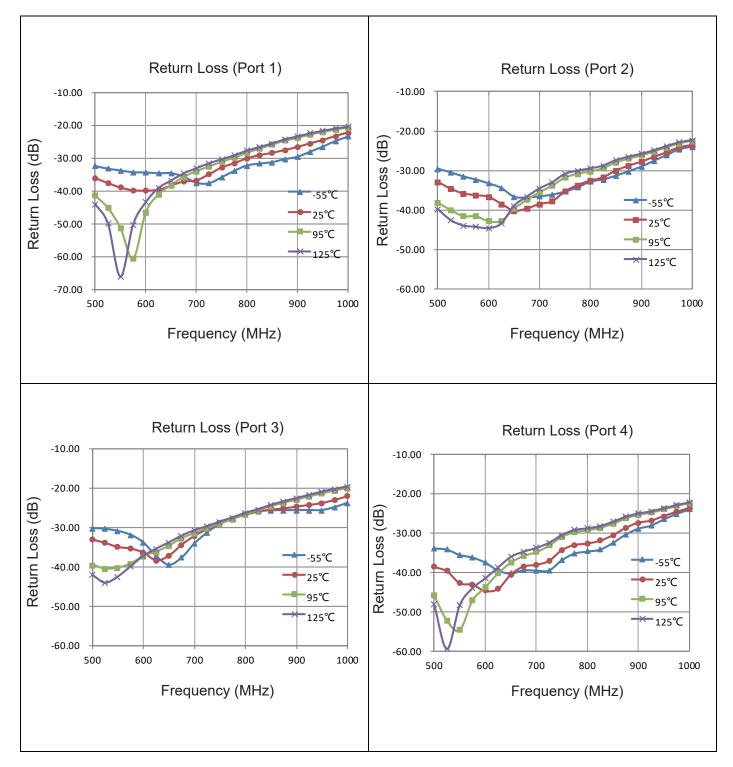


Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China Tel: 86-755-8355-1886 Fax: 86-755-8355-2533



Rev A1

Typical Performance (-55°C, 25°C, 95°C,125°C: 500-1000 MHz)

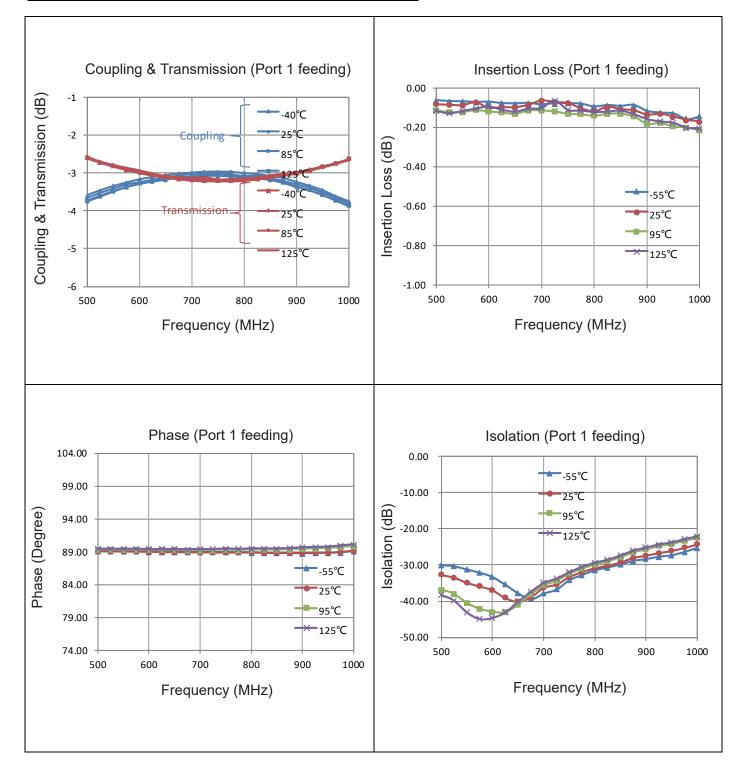

Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China Tel: 86-755-8355-1886 Fax: 86-755-8355-2533



HC0750L03

Hybrid Coupler 3 dB, 90°

Rev A1

Definition of Measured Specifications

Parameter	Definition	Mathematical Representation					
VSWR (Voltage Standing Wave Ratio)	The impedance match of the coupler to a 50Ω system. A VSWR of 1:1 is optimal.	$\label{eq:VSWR} = \frac{V_{max}}{V_{min}}$ Vmax = voltage maxima of a standing wave Vmin = voltage minima of a standing wave					
Return Loss	The impedance match of the coupler to a 50Ω system. Return Loss is an alternate means to express VSWR.	Return Loss (dB)= 20log $\frac{VSWR + 1}{VSWR - 1}$					
Insertion Loss	The input power divided by the sum of the power at the two output ports.	Insertion Loss(dB)= 10log $\frac{P_{in}}{P_{cpl} + P_{transmission}}$					
Isolation	The input power divided by the power at the isolated port.	Isolation(dB)= 10log $\frac{P_{in}}{P_{iso}}$					
Phase Balance	The difference in phase angle between the two output ports.	Phase at coupled port – Phase at transmisson port					
Amplitude Balance	The power at each output divided by the average power of the two outputs.	$10\log \frac{P_{cpl}}{\left(\frac{P_{cpl} + P_{transmission}}{2}\right)} \text{ and } 10\log \frac{P_{transmission}}{\left(\frac{P_{cpl} + P_{transmission}}{2}\right)}$					

Test Method


- 1. Calibrating your vector network analyzer.
- 2. Connect the VNA 4 Port to DUT respectively.
- 3. Measure the data of coupling through port 1 to port 4(S41).
- 4. Measure the data of transmission through port 1 to port 3(S31).
- 5. Measure the data of isolation through port 1 to port 2(S21).
- 6. Measure the data of phase port 4 & port 3(port 1 feeding).
- 7. Measure the data of return loss port 1, port 2, port 3 & port 4.
- 8. According to the above data to calculate insertion loss, amplitude balance & phase.

Note:

1. When calculating insertion loss at room temperature,

demo board loss should be removed from both coupling & transmission data. Please refer to the below table for demo board loss :

Frequency Range(MHz)	Demo Board Loss (dB) @25℃
470-860	0.07
800-1000	0.10
1200-1700	0.15
1700-2000	0.15
2000-2300	0.20
2300-2700	0.25




Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China Tel: 86-755-8355-1886 Fax: 86-755-8355-2533




Recommended PCB Layout



NOTE:

- 1. 50Ω line width is shown above designing from RO4350B dieletric thickness 0.762mm; copper 1 OZ
- 2. Bottom side of the PCB is continuous ground plane.
- 3. All dimensions shown in mm.

Reflow Profile

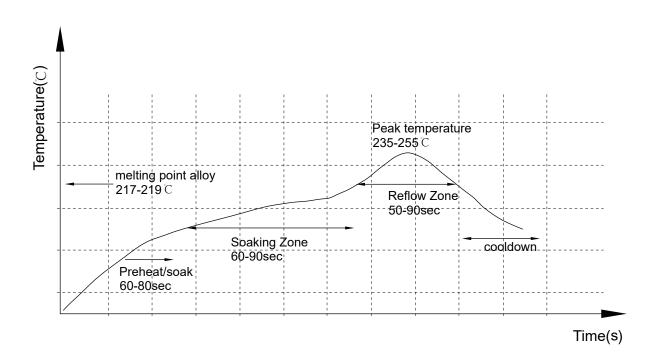


Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China Tel: 86-755-8355-1886 Fax: 86-755-8355-2533



Rev A1

Reliability Test Flow

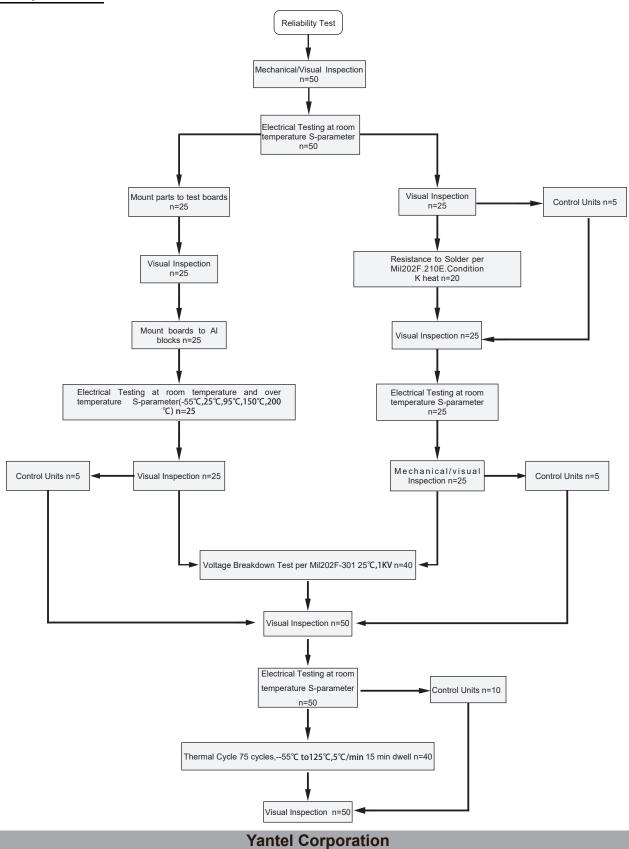


Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China Tel: 86-755-8355-1886 Fax: 86-755-8355-2533



Rev A1

Reliability Test Flow

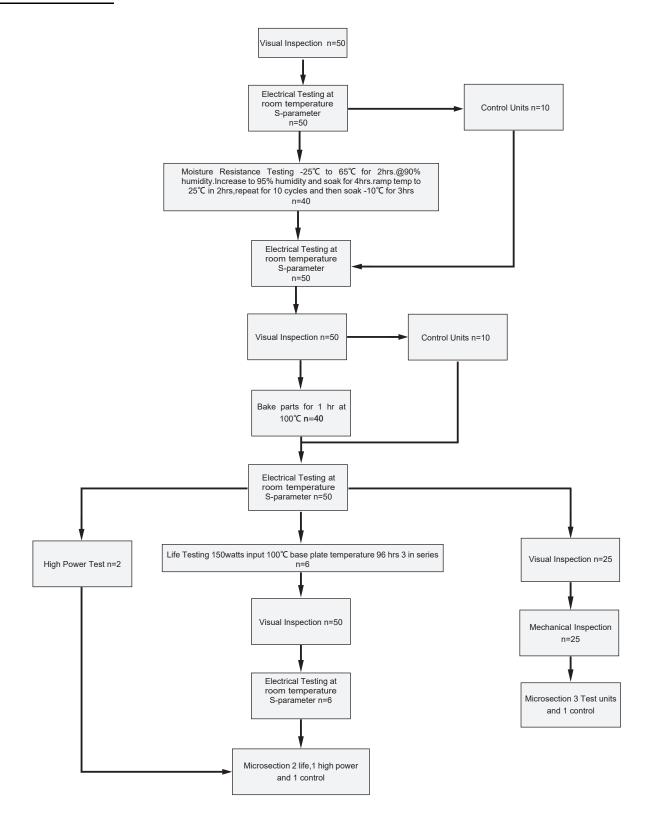


Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China Tel: 86-755-8355-1886 Fax: 86-755-8355-2533



Rev A1


Tape and Reel Drawing

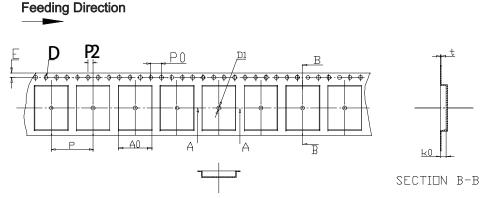

SECTION A-A

ITEM	W	A0	B0	K0	Ρ	F	Е	D	D1	P0	P2	Т	7″
DIM(mm)	24.00	12.6	16.9	2.30	16.00	11.50	1.75	1.50	1.50	4.00	2.00	0.30	P/R
TOLE	+0.30 -0.30					+0.10 -0.10						+0.05 -0.05	

- Notice:
- A.10 Sprocket hole pitch cumulative tolerance is 0.2mm.
- B. Carrier camber shall be not more than 1mm per 100mm through a length of 250mm.
- C. All dimensions meet EIA-418-B requirements.
- D. A0 & B0 measured as indicated.
- E. K0 measured from a place on the inside
- bottom of the pocket to top surface of carrier.
- F. Material: PS100
- G. Thickness: 0.30±0.05mm
- H. 400 units (maximum) / T&R

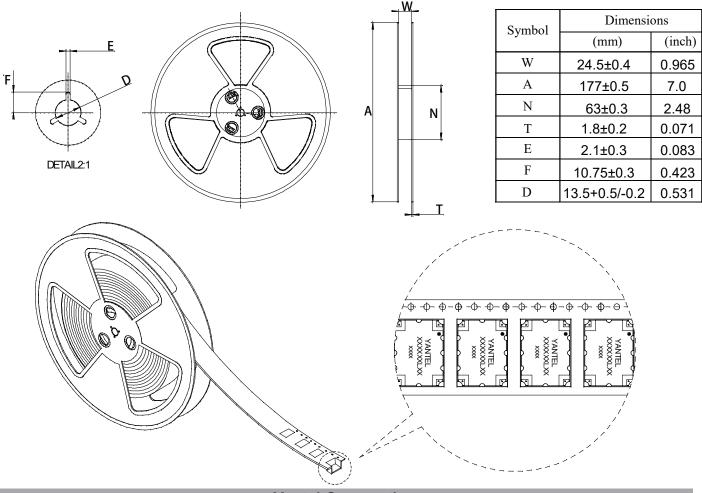

Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China Tel: 86-755-8355-1886 Fax: 86-755-8355-2533