

Fixed Attenuator

- ◆ DC to 6 GHz
- ◆ 15 dB
- ◆ 2 Watt
- ◆ SMA Stainless Steel Connectors

Features

- High attenuation accuracy
- Small VSWR
- Stainless Steel
- Ceramic chip
- Low cost-high performance

Specifications

| | |
|-----------------------------|-------------------------|
| Frequency Range | DC to 6 GHz |
| Attenuation | 15 dB |
| Attenuation Accuracy (Max.) | ±0.7 dB over DC – 6 GHz |
| Nominal Impedance | 50 Ohm |
| Average Power | 2 Watt |
| Operating Temperature | -55 °C to +125°C |
| Storage Temperature | -55 °C to +125°C |

Model No. Description

FATXXXXXX

- X- Material: (no code)=Brass
(S)=Stainless steel
- X- power handling: 2W or 5W.
- X- connector type: SMA, N type or
SMB connector.
- XX- attenuation: **dB.
- XX- 06 represents type number.


| FREQ. RANGE (GHz) | Typical VSWR(:1) | Maximum VSWR(:1) |
|-------------------|------------------|------------------|
| DC to 3 | 1.10 | |
| 3 to 4 | 1.15 | |
| 4 to 6 | 1.20 | |
| DC to 6 | | 1.30 |

Material & Plating


| Parts | Material | Plating(Micro-inch) |
|-------------------------|------------------|---------------------|
| Body & Nut | Stainless Steel | Passivated |
| Contact (female & male) | Beryllium Copper | Gold 30 |
| Insulator | Teflon | |

Characteristic

For example the testing curves of FAT0615S5S

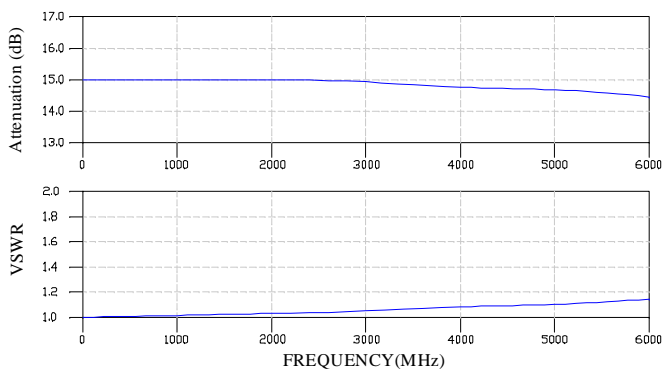

Package Outlines

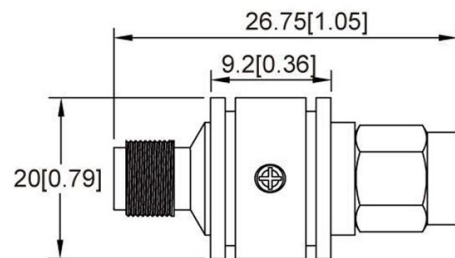


Package type: SMA

Note: all dimensions shown in mm & inch

Yantel Corporation

Add: 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China
Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

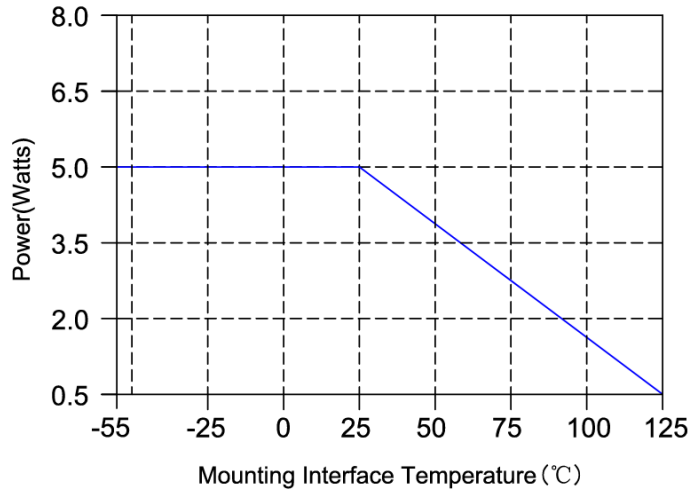Note:**Average power at 25°C ambient, derate linearly to 0.5W at 125°C****Yantel Corporation**

Add: 3F, Building 3, Southern District 2 of Zhongguan Honghualing Industrial Park, Xili, Nanshan, Shenzhen, China
Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com