


项目 Project	指标 Indicators
产品名称 Product Name	射频同轴衰减器/RF Coaxial Attenuator
频率范围 Frequency Range	DC-50 GHz
驻波比 VSWR	≤1.3
阻抗 Impedance	50 Ω
衰减精度 Attenuation Accuracy	0 0/+0.5 dB 1-3 -0.6/+0.9 dB 4-8 -0.7/+1.0 dB 9-25 -0.8/+0.8 dB 26-40 -0.9/+1.0 dB
平均功率 Average Power(W)	2W@25°C ambient, derating linearly to 0.5W at 100°C
峰值功率 Peak Power	200W(micro-sec pulse width, 1% duty cycle)
方向 Direction	Bidirectional 2.4 Male to 2.4 Female
使用寿命 Service life	≥500
接头类型 Connector type	2.4mm-Male to 2.4mm-Female
工作温度 Operation Temperature	-55°C ~ +85°C
内导体材质 Center Contact	铍青铜 镀金 Beryllium bronze Gold plating
外导体材质 Outer Contact	不锈钢 钝化 Stainless steel Passivation
绝缘体 Insulator	PEI

型号描述 Model No. Description
FATXXXX

XX- attenuation: dB value.

XX- 50 represents type number

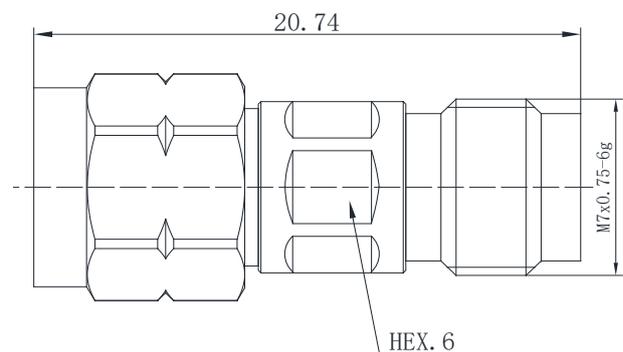

注: 尺寸(mm/[英寸]), 一般公差(± 0.1)

Note: Dimensions (mm / [inch]), General tolerance (±0.1)