


Electrical Specifications

Parameter	Min.	Typ.	Max	Unit
Frequency	3000		8000	MHz
Unbalanced Port Impedance		50		Ohm
Balanced Port Impedance		100		Ohm
Return Loss	8	-	-	dB
Insertion Loss	-	-	1.5	dB
Amplitude Balance	-2.5	-	2.5	dB
Phase Balance	160	-	200	Degrees
Operating Temperature	-40		85	°C

Outline Drawing:

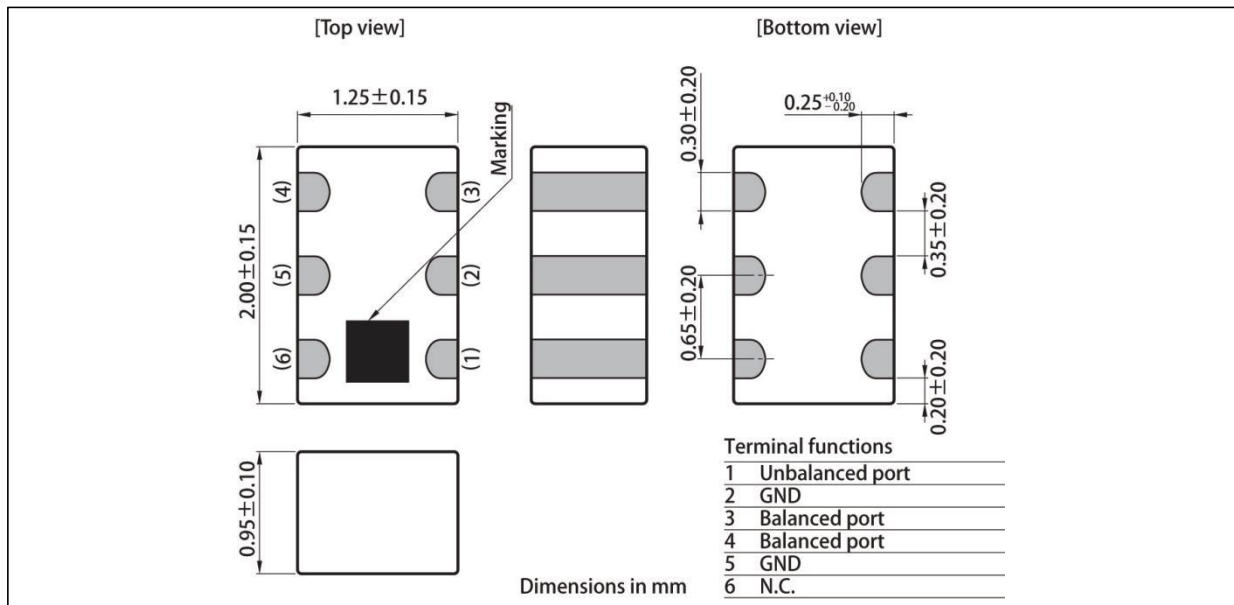

Mounting Configuration:

